



Hardware Realizations of Difference Equations – DePiero


The following examples are shown for 2nd order systems. The diagrams below contain unit delays (denoted by z^{-1}), as well as multipliers (denoted by B_k and A_k), and adders.

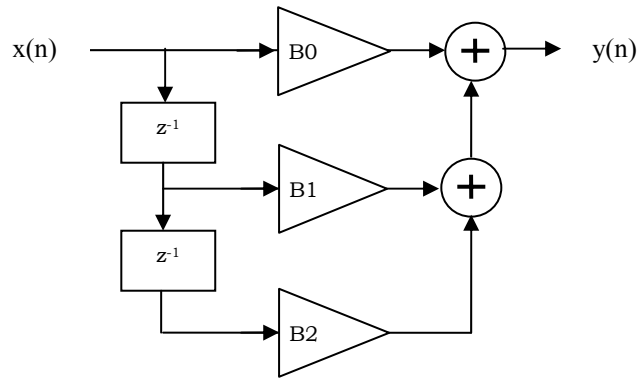


Direct Form I, for a 2nd order FIR system

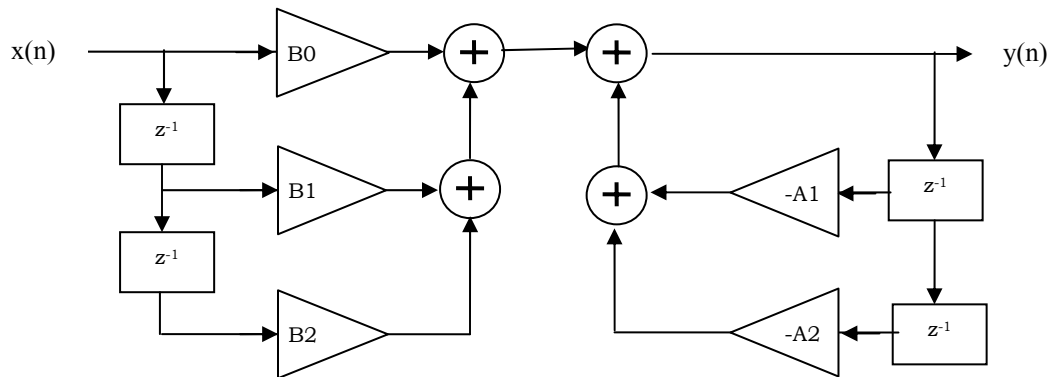

Direct Form I, for a 2nd order IIR system

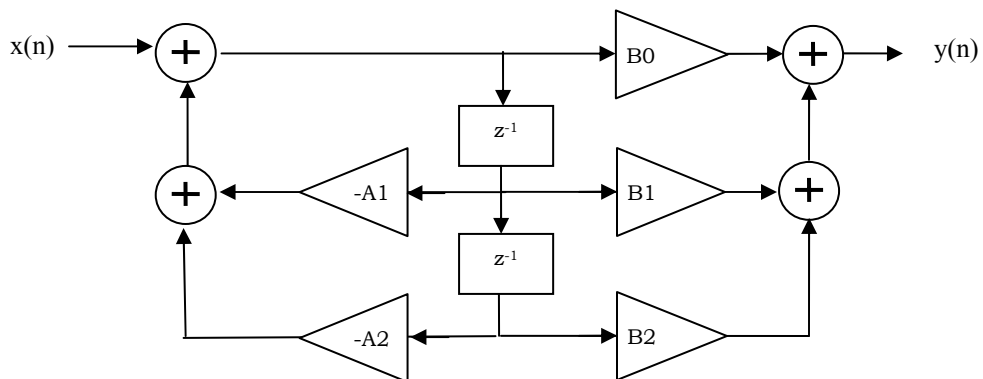

Direct Form II, for a 2nd order IIR system

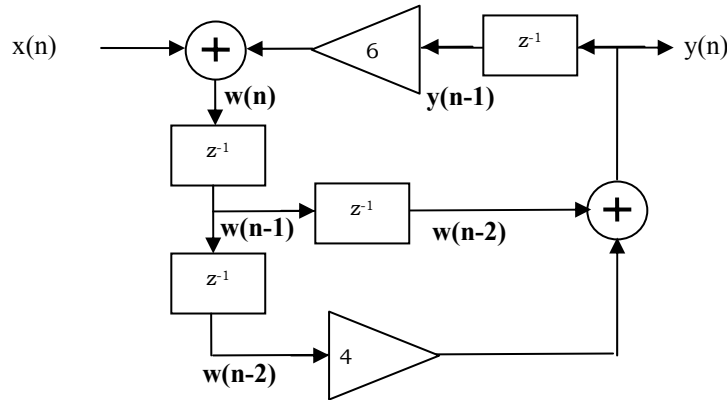

Hence the following expressions may now be identified from the diagram:

$$y(n) = w(n-2) + 4 w(n-2)$$

$$w(n) = x(n) + 6 y(n-1)$$

Substituting for w(n) yields


$$y(n) = 5 w(n-2) = 5 [x(n-2) + 6 y(n-3)] = 5 x(n-2) + 30 y(n-3)$$

Comparing to the standard form of a difference equation reveals, $B_2=5$ and $A_3 = -30$.

Lattice Filters

Lattice filters are an advanced type of structure. Lattice filters are not a direct realization, meaning that the multiplying factors in the structure are not simply the A_k and B_k values. IIR lattice filters have an advantage over direct realizations, generally being less sensitive to the effects of coefficient rounding. When coefficients are rounded, this implies a change in the pole/zero locations, which implies a change in the shape of the frequency response. Lattice filters typically suffer less change for a given amount of rounding than do direct filters.

The following structure depicts a 2nd order FIR lattice filter. Conversion formulas follow, that relate difference equation coefficients to the gain parameters of the lattice.

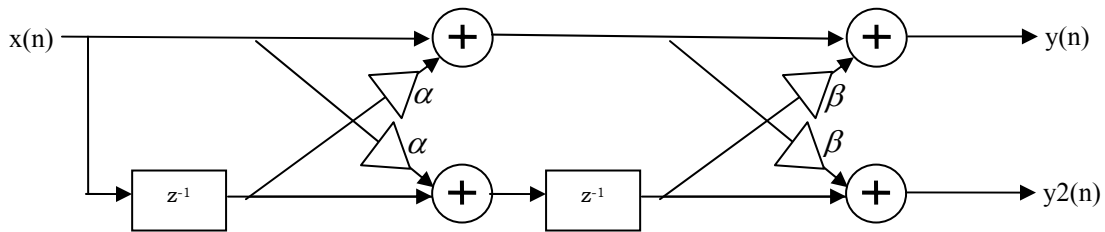

FIR Lattice Structure, for a 2nd order system having $B_0 = 1.0$


For the above structure,

$$B_0 = 1, \quad B_1 = \alpha(1 + \beta), \quad B_2 = \beta$$

Or, rearranging

$$\alpha = B_1 / (1 + B_2), \quad \beta = B_2$$

A 2nd order IIR lattice filter follows, with associated conversions.

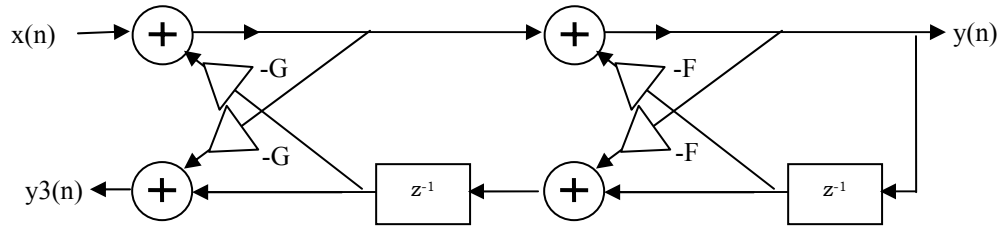

IIR Lattice Structure, for a 2nd order system having $B_0 = 1$ and $B_k = 0, k > 0$

In this case,

$$A_0 = 1, \quad A_1 = F(1-G), \quad A_2 = G$$

Or, rearranging

$$F = A_1 / (1 - A_2), \quad G = A_2$$

Higher order lattice filters employ repeated stages, similar to above. However the conversion formulae are more involved.